



QR holder plugging process:


<u>For T300 / TX / T-GT / T-GT II / TS-PS Racer / TS-XW</u>




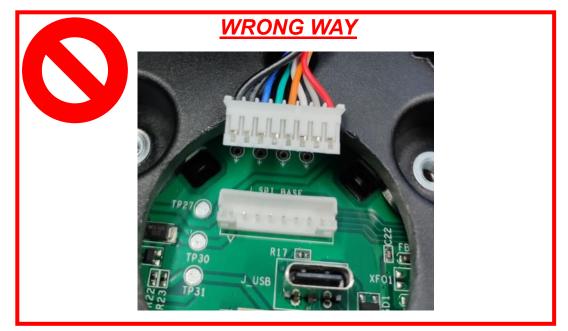

Take care to fully press-in the cable into connector.



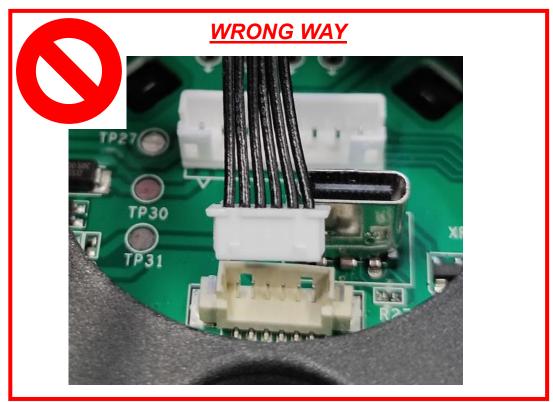

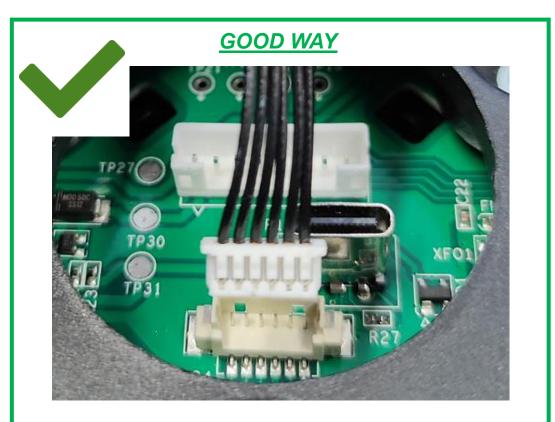

Take care to fully press-in the cable into connector.